

CD-660



6CD CHANGER




FEATURES

- 6CD Changer(MP3/WMA)
- Magazine Type Reliable Mechanism
- DOT MATRIX design VFD Display
- CD/CD-R/CD-RW/MP-3/WMA File Readable
- XLR(MONO/STEREO) & RCA Analog output
- Coaxial & Optical Digital Output
- AMX, CRESTRON Interface(RS-232C)
- IR Remote Control


SPECIFICATIONS

- ELECTRICAL *0dB=0.775Vrms
 - Audio Channel.....2 Channels
 - Frequency Response.....20Hz~20kHz, ± 0.5 dB
 - Distortion0.02%
 - S/N100dB
 - Analog Output Level2Vrms
 - Headphone Output Level1.5V at max (load impedance 32 Ω)
 - Quantization.....24bit
 - Sampling Frequency44.1kHz
- GENERAL
 - Power Source.....100~120VAC or 220~240VAC; 50/60Hz (supplied AC mains transformer depends on local requirements)
 - Power Consumption18W(Standby:Less than 1W)
 - Weight.....6.2kg/13.7lb
 - Dimensions482(W)x88(H)x380(D)mm
19(W)x3.5(H)x14.9(D)in

CD-660

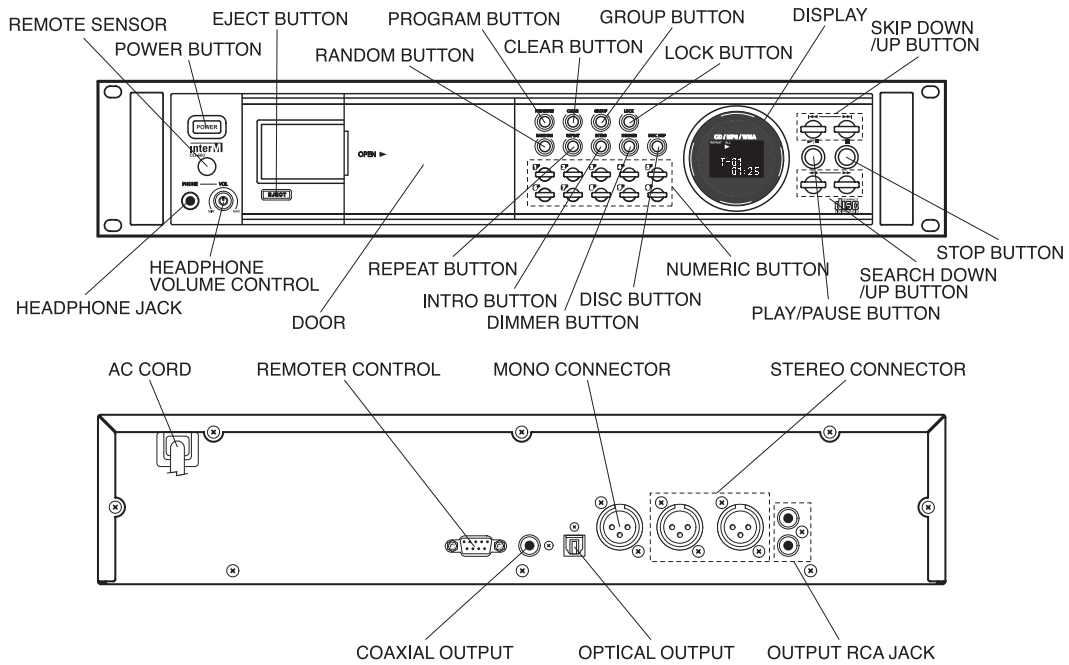

BLOCK DIAGRAM

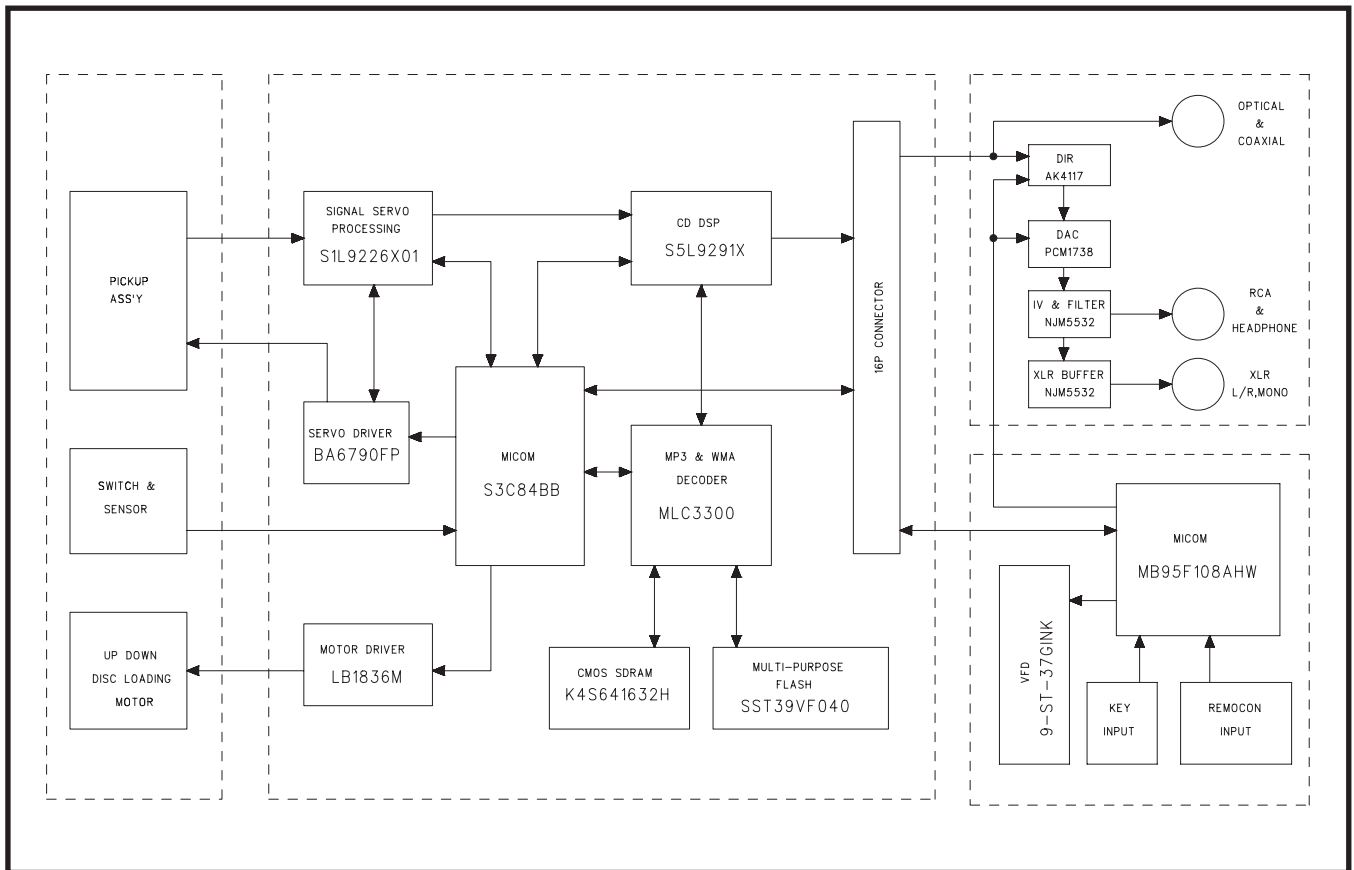

interM

OFFICE : 653-5 BANGHAK-DONG, DOBONG-KU, SEOUL, KOREA TEL : 82-2-2289-8140-8, FAX : 82-2-2289-8149

Home page : <http://www.inter-m.com>

E-mail : export@inter-m.com

9027104100