

## PAGING HORN SPEAKER



HS-30

HS-30RT

### FEATURES


- Excellent intelligibility & Loudness, High directivity, Good reliability.
- Adjust direction : Vertical 240°, Horizontal 160°.
- Units are commonly installed in commercial buildings, distribution centers, factories, schools, public areas, civic centers and recreational facilities.

### SPECIFICATIONS


	HS-30	HS-30RT
Rated Input	30W	30W
Impedance	330Ω(W) 660Ω(G)	330Ω(W) 660Ω(G)
Frequency Response	380Hz-6.5kHz	380Hz-6.5kHz
SPL(1m/1W)	107dB	107dB
Weight	2.85kg	2.95kg
Demension(mm)	∅280 ×350	320 ×210 ×365

# POLAR PATTERN DIAGRAM

HS-30

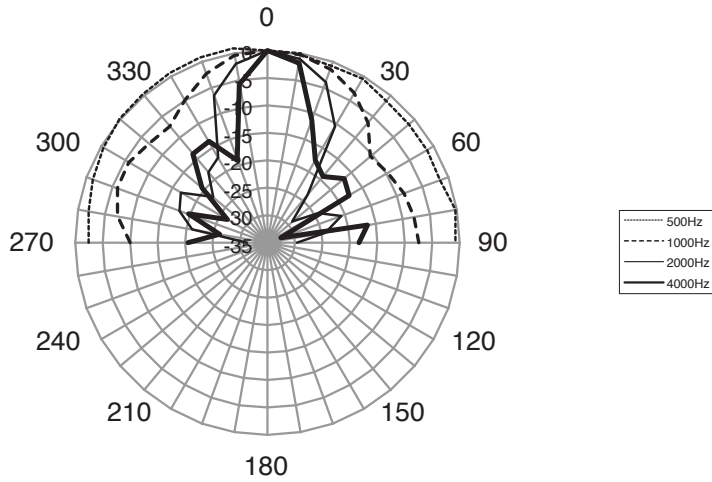

HS-30RT

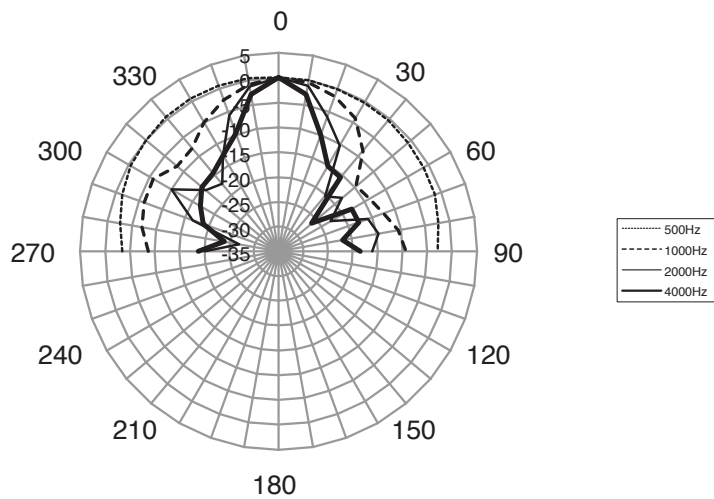

**interM**

OFFICE : 653-5 BANGHAK-DONG, DOBONG-KU, SEOUL, KOREA TEL : 82-2-2289-8140~8, FAX : 82-2-2289-8149

Home page : <http://www.inter-m.com>

E-mail : [export@inter-m.com](mailto:export@inter-m.com)

9027700510