

TU-610



STEREO TUNER




FEATURES

- FM/AM Digital Tuner
- Dot MATRIX design VFD Display
- Station Memory(FM/AM) : 40 Channels
- XLR & RCA Analog output
- AMX, CRESTRON Interface(RS-232C)
- IR Remote Control

SPECIFICATIONS

- ELECTRICAL *0dB=0.775Vrms
 - Usable Sensitivity.....FM:2 μ V
AM:18 μ V
 - T.H.D.FM(22.5kHz MOD): 0.2%
AM(30% MOD):1%
 - S/NFM(22.5kHz MOD):60dB
AM(30% MOD):50dB
 - Audio Output VoltageFM(75kHz Dev, 1kHz):1Vrms
AM(30% MOD):300mV
- GENERAL
 - Power Source.....100~120VAC or 220~240VAC; 50/60Hz
(supplied AC mains transformer depends on local requirements)
 - Power Consumption10W(Standby:Less than 1W)
 - Weight5.2kg/11.5lb
 - Dimensions.....482(W)x88(H)x380(D)mm
19(W)x3.5(H)x14.9(D)in

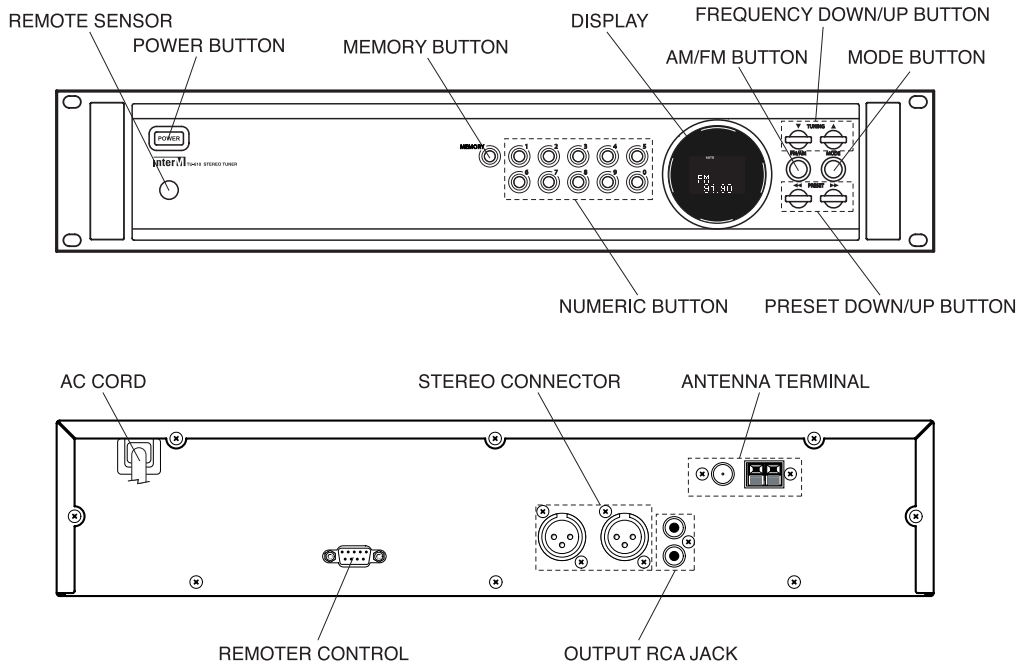

BLOCK DIAGRAM

